

# AVZ102-R102

Outdoor drain channel 100 mm with plastic frame and galvanized "C" profile grid A15

## Application


For drainage of public areas with pedestrians or cyclists, lawns, around buildings, pedestrian zones and areas of similar character

## Features

- Numerous ribbing for a firm fixation within surrounding material
- The drain can be simply cut in half to form two equal parts
- The cover of the side opening can also be used as an inlet connector – Ø75 mm
- Material with UV stabilizer against aging, fading and degradation of plastic
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Modular system – optional connection to form "I", "L", "T" or "X" shapes
- Galvanized grid with "C" profile – fixed to the drain by two plastic locks, inlet slit width 9 mm
- Prepared slots for using the locking bars to anchor the drain in concrete
- Ready for optional use of the odour trap with a grid for collection of the dirt
- Water connection from the side of the drain is possible at four locations – Ø50 mm
- Sophisticated and solid locking mechanism for simple connection of the individual drains
- Robust construction – self-supporting
- The grid can be removed from the drain only by releasing the plastic locks
- Easy access to the drain – easy to clean
- Bottom outlet waste connection Ø110 mm
- Lock system allows easy connecting without additional fixing elements

## Scope of supply

- Galvanized grid profile "C" – load class A15
- Drain body with plastic frame
- Locks for fixing the grid to the drain, 2 pcs

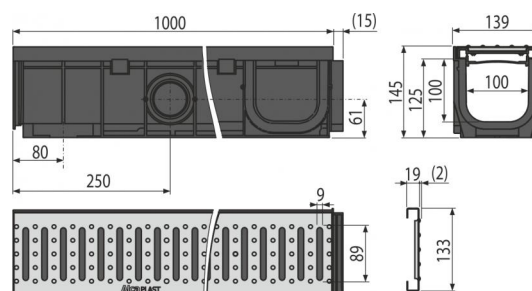

## Order number, Logistic information

Code	EAN	Weight (kus   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
AVZ102-R102	8595580511418	3,5950   3,5760   243,5600 kg	139x1015x145   800x1200x1750 mm	1   60 pcs

<b>Guarantee</b> 2/6 years	<b>Customs code</b> 39269097	<b>Norms</b> EN 1433
-------------------------------	---------------------------------	-------------------------

## Technical specifications

- Total installation height 145 mm
- Waste pipe diameter 110 mm
- Flow profile of the drain 95,3 cm²
- Load class A15 1500 kg
- Inlet cross-section of galvanized grid 258,6 cm²