

# APZ9-950M Simple

Shower drain with an edge for perforated grids

## Application


For wheelchair access  
For drainage of floor-level showers  
For installation into open spaces or near the wall of the shower area  
For indoor use

## Features

- Secure connection to the construction waterproofing system
- The combined odour trap (own protected patent solution) provides protection against the odours from the sewage even after the water dries out from the trap
- Material: polypropylene filled with talc resistant to mechanical, chemical and thermal damage
- Mechanically cleanable trap up to the waste pipe
- They are made of highly durable plastic that resists frost and chemistry
- Grid is included in packaging
- Self-adhesive tape for quality waterproofing
- Installation height from 62 mm
- Adjustable plastic anchoring legs 0–35 mm allowing fast and convenient installation, including the precise setting of the required level
- High resistance against chemicals

## Scope of supply

- Dismantling hook
- Fixing hardware for anchoring the adjustable legs: screw 4.2×9.5 – 8 pcs
- Fixation set: screw Ø4.2×38 – 8 pcs, dowel Ø8 – 8 pcs
- Combined odour trap SMART
- Stainless steel perforated grid Simple 9 in matt with a protective film
- Self-adhesive waterproofing tape
- Height adjustable feet 4 pcs
- Linear shower drain

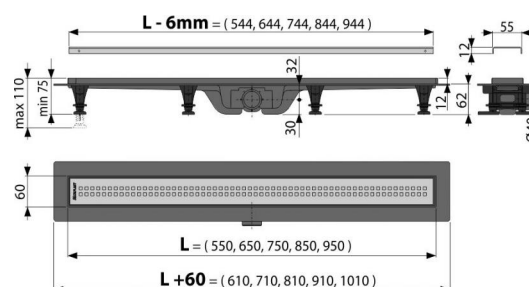

## Order number, Logistic information

Order number, Logistic information					
Code	EAN		Weight (kus   packing   palett)	Dimensions (piece   packing)	Quantity (packing   palett)
APZ9-950M	8595580537685	950 mm	2,4021   0,0000   0,0000 kg	1065x80x145   mm	30   90 pcs

Guarantee	Customs code	Norms
2/6 years	39229000	EN 1253

## Technical specifications

- Total installation height 75–110 mm
- Minimum thickness of concrete 62 mm
- Resistance of odour trap against the pressure 640 Pa
- Waste outlet diameter 40 mm
- Flow of the inlet grid 28 l/min
- Load class K3 300 kg
- Odor trap combined with a water seal 29 mm